Revised

Technical Memo for Laboratory Microcosm and Column Studies to Investigate In Situ Treatment of Perchlorate-Impacted (Source Area) Groundwater

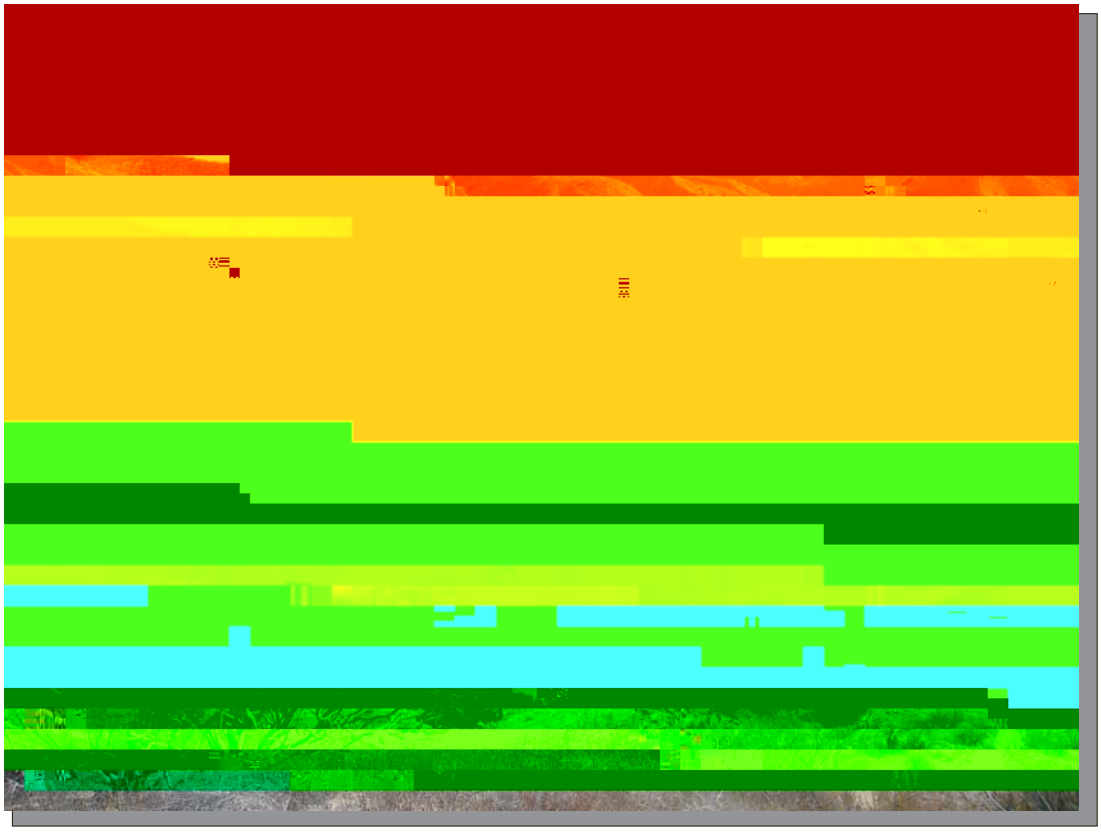

Lockheed Martin Corporation, Beaumont Site 2
Beaumont, California

LOCKHEED MARTIN

TETRA TECH

222 -0202 / 2010

RESPONSE TO COMMENTS, TECHNICAL MEMO FOR LABORATORY MICROCOSM AND COLUMN STUDIES
TO INVESTIGATE IN-SITU TREATMENT OF PERCHLORATE-IMPACTED (SOURCE AREA) GROUNDWATER AND SOIL
LOCKHEED MARTIN CORPORATION, 4 TRAP ROCK ROAD, 2ND FLOOR, 2 HARBOR PARK (UMONT)E STEN, NEW YORK 11768

R

RESPONSE TO COMMENTS

RESPONSE TO COMMENTS, TECHNICAL MEMO FOR LABORATORY MICROCOSM AND COLUMN STUDIES TO INVESTIGATE IN-SITU TREATMENT OF PERCHLORATE-IMPACTED (SOURCE AREA) GROUNDWATER AND SOIL

LOCKHEED MARTIN CORPORATION, BEAUMONT SITE 2

TETRA TECH, INC.

APRIL 2010

Lockheed Martin Corporation, Share

Technical Memo for Laboratory Microcosm and Column Studies

Corporation, Beaumont Site 2

omia, revised in accordance with responses to

Sincerely,

Denise Kaid
Remediation Analyst Senior Staff

Enclosure

and 1 hard copy)
Dresser, McKee (1 pdf)

(1 pd
John Eisenbeis, Ph.D, Camp

TABLE OF CONTENTS

ABBREVIATIONS AND ACRONYMS 1-1
Table 5 Summary of the Vadose Zone Microcosm Test Conditions, 25% Moisture 7
Table 6 Summary of the Vadose Zone Column Conditions 10
Table 7 Summary of Analyses Used for Liquid Samples 10
Table 8 Results of Analysis of As-Received Groundwater Samples 13
Table 9 Results of Analysis of As-Received Soil Samples 14

1.0 INTRODUCTION

This Technical Memo (TM) presents a summary of the results of the laboratory microcosm and column studies performed at the University of California, Riverside (UCR) to investigate applications for treatment of perchlorate-impacted source area groundwater and vadose zone soil at Lockheed Martin Corporation's Beaumont Site 2 (herein referred to as the "Site"). An overview of the experimental procedures used to test potentially applicable amendments for effectiveness in stimulating biological reduction of perchlorate is also provided within this report. The results of this study should be considered when making preliminary recommendations regarding potential treatment possibilities for saturated zone groundwater and vadose zone soils at the Site.

In addition to the information summarized in this report, other studies were undertaken to test potential amendments for treating perchlorate in groundwater near the property boundary in a biobarrier application. Results of these additional studies were previously submitted to the California Department of Toxic Substances Control in January 26, 2009 [1]. A summary of the drilling and sampling program that collected and tested the media used as part of both this study and this study was included as an appendix to the earlier study report. The results are included or discussed herein either as part of this TM, or by reference.

1.1 SUMMARY OF APPROACH

For this laboratory study, the suitability of several pre-selected electron donor amendments were assessed for effectiveness in stimulating biological perchlorate reduction and treatment of both groundwater in the source area aquifer matrix as well as the source area vadose zone soil. These tests included both microcosms and column work for both media (groundwater and vadose zone soil). Microcosms were used to screen selected amendments in terms of effectiveness, and to gain a general understanding of the potential rate of treatment. In addition, the effect

applied to soil columns to assess two simplified application scenarios: 1) batch flooding to simulate batch application of the soluble donor in a wet/dry cycling approach and 2) continuous wetting to simulate recirculation of the leachate through the vadose zone. These experiments provided a basic understanding of how perchlorate treatment is affected by amendment and moisture application to the vadose zone and the time required to achieve effective perchlorate reduction.

1.2 OBJECTIVES

The overall goal of the source area groundwater and vadose zone microcosm tests was to determine the most effective of the selected amendments in stimulating perchlorate bioreduction in the groundwater and vadose zone soil collected from the Site. Specific information sought in the microcosm testing included:

- Assessment of various amendments in terms of effectiveness in stimulating biological perchlorate reduction; and
- The general rate of perchlorate bioreduction.

The goal of the source area groundwater column tests was to:

- Compare the individual treatment performances of selected amendments to the source area aquifer soil.

Based on results obtained from the vadose zone microcosm tests, significant perchlorate degradation was not observed under unsaturated conditions at moisture contents of 15% and 25% with any of the tested amendments. However, in a supplemental test, it was determined that perchlorate biodegradation was

2.0 SUMMARY OF METHODOLOGY

Source area groundwater as well as aquifer and vadose zone soil samples were collected from the Site and sent to UCR for the study. Details of the sampling and analytical procedures and results were summarized in a previous report [1]. Data relevant to the bench-scale tests are presented and summarized in the following sections.

2.1 MICROCOSM PROCEDURES AND METHODS

Microcosm experiments were conducted to evaluate potential amendments for treatment of source area groundwater and vadose zone soil. Prior to conducting the microcosm experiments, the as-received soil was homogenized by screening out material greater than ½-inch, followed by hand-mixing on a tarp. The processed soil was stored in a cold room at 3 °C prior to use. Experiments were conducted both with and without nutrient addition. The procedures and methods for each experiment are outlined below.

2.1.1 Source Area Groundwater

Microcosm experiments were used to evaluate five amendments for source area groundwater treatment, both with and without nutrient (diammonium phosphate) addition. These amendments are summarized in Table 1.

Table 1
Electron Donor Amendments used in Source Area Microcosm Tests

Material	Source
Emulsified Oil Substrate (EOS 598)	EOS Remediation, Inc.
Glycerin	US Glycerin
High fructose corn syrup (HFCS 42)	Sweetener Products Company
Acetic acid	Fisher Scientific
Sodium acetate	Fisher Scientific

For the source microcosms, Emulsified Oil Substrate (EOS 598), high fructose corn syrup (HFCS 42), glycerin, acetic acid, and sodium acetate were mixed with site soil and then placed into the microcosms. These amendments were added at dosages as listed in Table 2. Groundwater from the contaminant source area was added to the microcosms at a solid/groundwater ratio of 1:4 (weight-to-weight [w/w]) in 250 milliliters (mL) glass serum bottles with a minimal headspace. The bottles were sealed with a septum cap that allowed for withdrawal of solution from the bottle. The microcosms were mixed by inversion three times per day to promote mixing of the solid substrate with the groundwater.

Microcosms containing as-collected soil/groundwater

All amended and control microcosms were run in triplicate. Table 2 provides a summary of the microcosm test conditions.

Table 2
Summary of Source Area Microcosm Test Conditions

Ground-water source	Soil mass + ground-water volume	Soil only control	EOS[a]	Glycerin	High fructose corn syrup	Acetic acid	Sodium acetate
Aquifer underlying source area High perchlorate concentration	50 g soil in 200 mL of GW	Aquifer soil under-lying source area	EOS added to GW at 0.1 & 0.5% (v/v). For nutrient amended microcosms, 1 g/L of diammonium phosphate was added to the solution.	Glycerin added to GW at 0.1 & 0.5% (v/v). For nutrient amended microcosms, 1 g/L of diammonium phosphate was added to the solution.	High fructose corn syrup added to GW at 0.1 & 0.5% (v/v). For nutrient amended microcosms 1 g/L of diammonium phosphate was added to the solution.	Acetic acid added to GW at 280 and 1,440 mg/L. For nutrient amended microcosms, 1 g/L of diammonium phosphate was added to the solution.	Sodium acetate added to GW at 1000 and 5000 mg/L. For nutrient amended microcosms, 1 g/L of diammonium phosphate was added to the solution.

Notes:

a 0.1 percent emulsified oil substrate solution is recommended by the manufacturer for laboratory testing.
EOS – emulsified oil substrate
g – grams
mL – milliliters
GW – groundwater
% – percent
v/v – volume-to-volume
g/L – gram per liter
mg/L– milligram per liter

Water samples were withdrawn using a syringe and filtered [0.45 micrometer pore size]. Perchlorate, nitrate, and total organic carbon (TOC) were measured periodically over an 18-day or shorter period. This included time (t) = 0 (immediately following addition of amendments) and four additional time points for both perchlorate and nitrate. Specific analytical methods are provided in a later section. TOC was measured at t = 0 and the final sampling event.

Concomitant with perchlorate reduction, remedial efforts may alter site geochemistry, which could lead to mobilization of certain naturally occurring inorganic constituents such as arsenic, iron, and manganese. This may have negative implications with respect to general groundwater quality in the immediate

vicinity of treatment during field applications. Other parameters to assess general geochemistry and potential metal mobilization were also measured.

2.1.2 Vadose Zone Soil

Microcosm experiments were used to evaluate five amendments for vadose zone soil treatment. These amendments are summarized in Table 3.

Table 3
Electron Donor Amendments used in Vadose Zone Microcosm Tests.

Material	Source
Glycerin	U.S. Glycerin
High Fructose Corn Syrup	Sweetener Products Company
Sodium Acetate	Fisher Scientific
Ethyl Acetate	Fisher Scientific
Liquefied Petroleum Gas/Hydrogen Gas/Carbon Dioxide	Local supplier/Praxair/Praxair

The vadose zone soil microcosm testing assessed the impact of amendments, moisture content, amendment concentrations, and the addition of nutrient (diammonium phosphate) on perchlorate biodegradation.

For the microcosm tests, the as-received vadose zone soil was deemed to be unrepresentative of the established or expected perchlorate contamination levels. Therefore, perchlorate was added to the concentrated amendment solution as needed to bring the soil perchlorate concentration to a level of approximately 4,000 micrograms per kilogram (µg/kg).

In addition to spiking with perchlorate, the soil moisture content was raised to 15 percent (%) using dechlorinated tap water. For the soluble amendments, substrate was added to the tap water to bring the amendment/soil ratio to the desired level. The gaseous electron donors, ethyl acetate and liquefied petroleum gas/hydrogen gas/carbon dioxide mixture were introduced into the headspace after sealing the microcosm. The ethyl acetate was allowed to evaporate and the flask was shaken 30 seconds to ensure homogeneous distribution of ethyl acetate. For the

septum onto the inside surface of the glass bottle. The microcosms were then incubated at room temperature. At designated times, a set of microcosms (three per each amendment and control) was opened and sacrificially sampled to determine perchlorate degradation after incubation for a selected period of time. Soil samples were collected by emptying the microcosm, homogenizing the soil by hand mixing, and randomly selecting a representative 10 gram aliquot for analysis.

Table 4
Summary of the Vadose Zone Microcosm Test Conditions, 15% Moisture

Soil source	Amendment					
	Soil only control	Glycerin	High fructose corn syrup	Sodium acetate	Ethyl acetate	LPG/H_2/CO_2
Vadose zone soil from source area High perchlorate concentration	Soil with DI water added to test field moisture content.	Glycerin added to soil at 100 and 500 mg/kg soil at the target field moisture content. For nutrient amended microcosms 1 g/L of diammoniu m phosphate will be added to the solution.	High fructose corn syrup added to soil at 100 and 500 mg/ kg soil at the target field moisture content. For nutrient amended microcosms 1 g/L of diammonium phosphate will be added to the solution.	Sodium acetate added to DI water soil at 100 and 500 mg/ kg soil at the target field moisture content. For nutrient amended microcosms 1 g/L of diammonium phosphate will be added to the solution.	Soil with DI water added to the target moisture content. Ethyl acetate (60 microliters) was added and evaporated in the headspace of the microcosm.	Soil with DI water added to the target moisture content. A mixture of LPG/H_2/CO_2 (80%/10%/10 %) will be added to fill the void & headspace of the microcosm.

Notes:
DI – deionized water
mg/kg– milligram per kilogram
g/L – gram per liter
LPG/H_2/CO_2 – liquefied petroleum gas/hydrogen gas/carbon dioxide
% – percent

Because of the lack of significant perchlorate degradation during the 15% moisture content microcosm tests, a second set of vadose zone soil microcosms was set up with an increased moisture content of 25%. At 15% moisture content, the vadose soil can be qualitatively described as being somewhat cohesive and crumbly. At 25% moisture content, the vadose zone soil was found to be cohesive and had the characteristics of modeling clay (able to hold a definite shape while being molded by hand). Therefore, at 25% moisture content only, soluble amendments were tested in microcosms – glycerin, sodium acetate, and HFCS. These amendments were added to the water used to increase the soil moisture content. A summary of the test conditions for the 25% moisture content microcosms is provided in Table 5.

A third vadose zone microcosm test was conducted to check for lack of perchlorate degradation at the 25% moisture content condition. To check whether perchlorate degrading bacteria were present and could be stimulated, the third microcosm test was conducted by saturating the vadose zone soil using only sodium acetate as the electron donor at an amendment dosage of 500 milligrams per kilogram (mg/kg), both with and without nutrient addition. At the end of the microcosm study period, the final microcosms were analyzed for pH, nitrate, nitrite, and TOC.

Table 5
Summary of the Vadose Zone Microcosm Test Conditions, 25% Moisture

Soil source	Amendment			
	Soil only control	Glycerin	High fructose corn syrup	Sodium acetate

input for the full-scale treatment system. A detailed discussion regarding the methodology can be found in [2].

Prior to conducting the column tests, the as-received soil samples were homogenized by screening out material greater than ¼-inch, followed by hand-mixing on a tarp. The processed soil was stored in a cold room at 3 °C prior to use.

2.2.1 Source Area Groundwater

Three sets of four parallel 2-inch (5.1 centimeters [cm]) diameter polyvinyl chloride pipe columns were constructed in lengths of 6 inches (15 cm), 12 inches (30 cm), 18 inches (45 cm) and 24 inches (60 cm). The three sets of columns were used to assess treatment performance by (1) aquifer soil alone (control), (2) EOS-amended aquifer soil, and (3) glycerin-amended aquifer soil to obtain treatment performance as a function of column travel. EOS and glycerin were both mixed with Site source area aquifer soil at ratios of 0.3% (w/w) prior to column packing. Multiple, short diameter parallel columns were used instead of one large column to reduce the volume of water needed to run the tests.

This approach simplified the sample collection procedure by allowing for collection of sufficient sample volume (20 to 25 mL) from the bottom of each column (representing the various distances from inlet to sampling point) for the various analyses in a reasonable time period, and prevented significant disruption of the flow through the column during sampling. If samples were taken from ports down the length of a single column, samples would need to be withdrawn by syringe. At low flow rates, if the sample is taken in a reasonable time period (5 minutes), a significant amount of the water is withdrawn from the column (not just at the sampling port), disrupting the bulk flow. Thus, the sample may not be representative of the flow at the sampling location. For this low flow rate, the sampling time for a sufficient volume was on the order of 1.5 to 2.0 hours per location. By using individual columns for the different lengths, the effluent from the columns were collected as a composite to represent performance as a function of length.

Columns were set up by compacting soil and then saturating with source area groundwater by pumping upward to allow pore gases to escape. Following saturation, source area groundwater was introduced into the columns at a rate equal to an approximate approach velocity of 0.5 feet per day (ft/d) [15 centimeters per day] or about 0.31 liters per day (L/d) and 1.24 L/d per column and set of columns, respectively. This velocity is in the higher range of groundwater velocities expected at the Site. No nutrient was added to the site groundwater. Samples were collected periodically from each column and analyzed for perchlorate, pH, nitrate, and TOC.

2.2.2 Vadose Zone Soil

The baseline vadose zone soil sample did not contain an expected level of perchlorate contamination and there was insufficient volume remaining for the column testing. Therefore, for the vadose zone soil column study, a new soil sample from the Site was collected from a different location, one that was known to be in the “hot” zone. The perchlorate concentration of this new soil sample was found to be 100 mg/kg in subsequent testing and more representative of perchlorate levels in source area soil.

Six-inch (15 cm) long columns, with a 2 inch (5 cm) inner diameter, were packed with site soil. The vadose zone columns were amended with the electron donor by applying a specified volume of solution amended with the substrate. The substrate solution consisted of local (Riverside) dechlorinated tap water containing the amendment at a concentration of 0.5% (v/v) and 20 mg/L of diammonium phosphate. The substrate solution application was done in either a batch mode (Treatment Scenario 1) or recirculating mode (Treatment Scenario 2).

Treatment Scenario 1

The columns used for this scenario were used to simulate soil flooding, followed by natural drainage. This process simulates one time application of an amendment. Approximately two pore volumes of water, 300 mL, were pumped upward into the packed vadose zone columns at a rate of about 1 milliliter per minute (mL/min) to saturate the soil. Influent water contained EOS or glycerin at 0.5% volume-to-volume (v/v) to ensure that the electron donor was not limiting. In addition, 20 mg/L of diammonium phosphate was added as a nutrient supplement. The nutrient dosage was kept relatively low, based on the desire to supply nutrients, but to limit addition of nitrogen to the system, which may be of concern in the field application. Once the solution was added and the columns were saturated, the effluent port was opened and the column was allowed to drain. Collected leachate was analyzed for perchlorate, nitrate, pH, and TOC. Once the columns were drained, the effluent ports were closed and the columns were left with the top open to the atmosphere.

Columns were sampled on a sacrificial basis by emptying the colum, homogenizing the soil by hand-mixing, and randomly selecting a representative 10 gram aliquot for analysis. Representative soil samples

flume(v(C(mixin [(tch)-55d m)8.678 -3041)5.e(open ton(ed I1n7268n [(0s w016 Tc w [(c)um)7.8,7y)-7.5ixin [(t

the vadose zone soil is maintained at nearly saturated conditions by pumping the underlying groundwater and applying it over the surface.

For this treatment scenario, donor/water solutions (as described above) were applied on a recirculating basis at a rate of about 0.1 mL/min, which is equivalent to about one pore volume per day. Like Treatment Scenario 1, influent water contained EOS or glycerol at a concentration of 0.5% (w/w) with nutrient (diammonium phosphate) at 20 mg/L, or no amendment (control). The solution was pumped from and returned to a reservoir to simulate the recirculation process. Columns were also sampled on a sacrificial basis as described above under Treatment Scenario 1. Representative soil samples from each column were measured for perchlorate, nitrate, pH, TOC, and moisture content at 0.5, 1, 2, 4, and 8 weeks. Also, recirculated water from the reservoir was analyzed for perchlorate, nitrate, pH, and TOC.

Table 6 summarizes the set up/analysis of vadose zone columns.

Table 6
Summary of the Vadose Zone Column Conditions

Treatment Scenario (see above)	Amendments	Sampling Frequency	Total number of columns	Conditions
1	Emulsified Oil Substrate, Glycerin, None (control)	0, 0.5, 1, 2, 4, 8 weeks	18	Saturate initially, allow to drain
2	Emulsified Oil Substrate, Glycerin, None (control)	0, 0.5, 1, 2, 4, 8 weeks	18	Maintain saturated condPo856 -dv(nd)-e

For the soil analysis, the soil from each column was removed and mixed to homogenize the soil from which a representative sample was taken. The extraction procedure of Nozawa-Inoue et al. [5] was be used to determine soil perchlorate and nitrate concentration.

2.4 QUALITY ASSURANCE/QUALITY CONTROL

The data quality objective is to collect data with high enough degree of certainty to distinguish performance differences between non-amended controls and beneficial performance in treatment microcosms upon addition of one or more electron donors. Alternatively, there should be sufficient data to state that performance under the various conditions was statistically similar. This objective requires accurate quantitative data for all measured constituents and a reasonable degree of certainty for the degradation rates determined. To ensure that these data quality objectives are met, analytical instruments were calibrated using commercially available reference standards for each set of samples. Matrix spikes and analytical duplicates were analyzed at least once in every twenty samples to assess accuracy. Triplicate microcosm samples were conducted for replication and possible statistical analyses. Observations and data collected in the laboratory were recorded in permanently bound, dedicated lab books.

Table 8
Results of Analysis of As-Received Groundwater Samples

		Wet Chemistry (mg/L)			Nutrients (mg/L)	Alkalinity (mg/L)
Sample Name	Perchlorate (g/L)	pH (unitless)	Total Organic Carbon	Electroconductivity (s)		

relatively low levels. Finally, previous microbiological testing showed that perchlorate-reducing bacteria were present in soil samples [1].

3.2 SOURCE AREA VADOSE ZONE SOIL

As shown in Table 9, the perchlorate level in the initial soil sample (15B-20') was <10.7 µg/kg and less than previously reported values of 4,000 µg/kg. Therefore, as outlined in the work plan for the vadose zone microcosms, the initial soil sample was spiked with perchlorate. Because the initial soil sample had low perchlorate concentrations, an additional source area vadose zone soil sample was collected for use in the column tests. The additional sample was collected during the recent Dynamic Site Investigation [18], from boring K-54-SB116 between 20 and 25 feet bgs. Perchlorate results for samples collected at depths of 20 and 25 feet bgs were 130 and 18 mg/kg, respectively (Table 9).

In the initial sample, the TOC concentration was 102 mg/kg, which is one-hundredth of one percent. The soil pH was 9.3, which is quite alkaline but consistent with soils in arid/semi-arid areas with carbonate minerals. Literature suggests that a pH between 6.0 and 8.5 is generally favorable for biological treatment of perchlorate [6][7]; therefore, site conditions appear to influence perchlorate persistence in the area.

Total phosphorus in the initial sample was detected at a low level, 1.0 mg/kg, and the ortho-phosphate (the predominant biologically available form) was about 40% of the total phosphorus. These results indicate the presence of these macronutrients, albeit at relatively low levels. The potential effects of enhancing these nutrients were assessed in the microcosms and columns. Finally, microbiological testing showed that perchlorate-reducing bacteria were present in soil samples [1].

4.0 RESULTS AND DISCUSSION

4.1 SOURCE AREA GROUNDWATER TREATMENT

Results for the source area groundwater microcosm and column tests, and brief discussions are provided in the following subsections.

4.1.1 Source Area Groundwater Microcosm Tests

Source microcosm results are included as Figures 1 through 4. Microcosm results without nutrient addition for the lower and higher amendment dosages without nutrient addition are shown in Figure 1. Results for the lower and higher amendment dosages with nutrient addition are shown in Figure 2.

Reduction of Perchlorate without Nutrient Addition

As shown in Figure 1, nearly complete perchlorate reduction was observed in microcosms receiving EOS, glycerin, and sodium acetate (at both the lower and higher dosages) in 17 days or less. Limited perchlorate reduction was also observed using HFCS 42 at the lower dosage after 13 days. Little or no perchlorate removal occurred with acetic acid. Based on comparisons in Figure 1, the effects of higher dosages vary somewhat, but are likely not significant. In the case of EOS, the onset of perchlorate degradation occurred a few days earlier for higher dosages compared with the other donors. There was very little difference between the higher and lower dosages for the glycerin trials. With sodium acetate, the higher dosage actually resulted in a delay in perchlorate degradation. This same delay may have also occurred with HFCS 42, if this were tested. Overall, the observed differences between higher and lower dosages and the various carbon substrates did not appear significant to warrant the use of the higher dosage to serve the desired perchlorate treatment objective.

Reduction of Perchlorate with Nutrient Addition

As shown in Figure 2, nearly complete perchlorate reduction was observed in microcosms receiving EOS, glycerin, and sodium acetate at both dosages tested. Limited perchlorate reduction was also observed using HFCS 42 at either dosage, although the higher dosage was slightly more effective. Little or no perchlorate removal occurred with acetic acid. Based on comparisons in Figure 2, the effects of higher dosages vary somewhat, but again are likely not significant. In the case of the EOS microcosms, perchlorate degradation was complete a few days earlier in the higher dosage treatment compared to the lower dosage treatment. For the glycerin trial, there was a lag in the initiation of the perchlorate degradation and an even longer delay for sodium acetate at the higher dosage. For HFCS, there was little difference in perchlorate degradation initiation. Again, the differences that were observed did not appear to be significant to the desired perchlorate treatment objective.

The results presented in Figures 1 and 2 suggest that EOS, glycerin, and sodium acetate appear to promote efficient perchlorate degradation. However, to minimize salt/ion additions to the aquifer, EOS and glycerin would likely be preferable to sodium acetate. As a result, the focus of the column tests was the use of EOS and glycerin.

Individual microcosm results for EOS and glycerin are shown in Figures 3 and 4, respectively. As can be seen in both Figures 3 and 4, nutrient addition seemed to

Table 11
Initial-Final Water Analyses for EOS Amended Microcosms

Parameter	MDL, mg/L	Without Nutrient		With Nutrient	
		Initial, mg/L	Final, mg/L	Initial, mg/L	Final, mg/L
Nitrite as Nitrogen	0.090	1.7	ND	4.7	ND
Arsenic	0.070	ND	ND	ND	ND
Iron	0.15	ND	ND	ND	ND
Manganese	0.070	0.083	0.39	ND	0.22

No perchlorate degradation was seen in any of the control set of columns as expected (see Figure 7). Thus, it is unlikely that natural attenuation of perchlorate will occur in the groundwater as it passes through the source area aquifer soil.

EOS-Amended Columns

In the EOS-amended soil columns (Figure 8), perchlorate degradation began gradually over the first two weeks and then progressed rapidly. After about 20 days, perchlorate removal was nearly complete in the 12 inch column, and complete in the 18 inch and 24 inch columns. Perchlorate reduction reached a maximum of about 35% in the 6 inch column after 20 days. After about 50 days of operation, a gradual decrease in perchlorate reduction was observed in the 6 inch and 12 inch column. After about 90 days of operation, a gradual decrease in perchlorate reduction was observed in the 18 inch column. After 20 days, effluent perchlorate concentrations from the 24 inch column remained well below 1 mg/L for the duration of the column testing.

Perchlorate reduction profiles for the EOS columns at various times during the column testing are shown in Figure 9. As can be seen, there is a general decrease in the degradation rate over the 120-day test period. Effluent perchlorate concentration profiles are generally observed to be shifting to the right as seen in the figure with the increase in number of days of operation.

Glycerin-Amended Columns

In the glycerin-amended soil column, glycerin at a concentration of 0.3% (mass basis) was mixed into the soil prior to packing. From Figure 10, it can be seen that after approximately 20 days, no perchlorate degradation was observed. In contrast, perchlorate degradation was initiated in the similarly amended EOS columns (see Figure 8) within that same time frame.

To help induce perchlorate degradation, 300 mg/L of glycerin was added to the influent on Day 25, which is equivalent to about five times the stoichiometric amount needed for perchlorate/nitrate biodegradation. After glycerin addition, perchlorate degradation was observed, but subsided when glycerin supplementation was discontinued. At Day 53, glycerin addition was temporarily discontinued. Within a few days, little or no perchlorate degradation was observed in the effluent from the 6 inch, 12 inch, 18 inch, and 24 inch columns.

At Day 68, glycerin addition into the source area groundwater influent was again initiated, except at a concentration of 120 mg/L, or only about two times the stoichiometric amount for perchlorate/nitrate degradation. Significant perchlorate degradation was observed in each of the columns, with about 90 percent removal in the 24 inch column.

At Day 96, the glycerin addition into the source area groundwater influent was lowered to 60 mg/L, or about the stoichiometric amount needed for perchlorate/nitrate biodegradation. After Day 96, perchlorate biodegradation decreased significantly at all column lengths until the end of the testing.

Nitrate reduction in the glycerin-amended columns is shown in Figure 11. Prior to Day 25, partial to nearly complete nitrate reduction in the columns occurred. However, after that time, nitrate reduction began to decrease. This trend is most likely due to rapid loss of glycerin (in comparison to EOS) from the soil during this period due to biodegradation and leaching. Due to the lack of sufficient electron donor, the denitrification rate decreased. Without complete denitrification, perchlorate biodegradation is inhibited. Hence, no perchlorate degradation was observed when incomplete denitrification occurred. It was not until additional glycerin (300 mg/L) was added to the source area groundwater influent that complete denitrification occurred and concomitant perchlorate reduction was observed. In contrast, complete denitrification was observed in the EOS amended columns at all times (data not shown).

4.2 Source Area Vadose Zone Soil Treatment

Results for the source area vadose zone microcosm and column tests and brief discussions are provided in the following subsections.

4.2.1

donor, with and without nutrient addition. The results of this microcosm test are shown in Figure 15. In this saturated microcosm test, perchlorate reduction was initiated within 5 to 7 days with and without nutrient addition. Perchlorate treatment was near complete after 9 days without nutrient addition and 6 days with nutrient addition.

Based on these results, perchlorate biodegradation can be stimulated in the vadose zone soil. It appears that a favorable biodegradation environment was not produced by the mere addition of electron donor and nutrient at a soil moisture content of either 15% or 25%. The limiting condition that results in perchlorate inhibition was not determined. Successful perchlorate biodegradation under saturated conditions and minimal (at best) perchlorate degradation at 15% and 25% soil moisture conditions indicates the possibility of a dilution effect. The soil has a readily desorbable perchlorate and salinity component. The concentration of these constituents in the aqueous phase is a function of the soil moisture content. There is more water in the soil at 25% moisture content than 15%. At saturation, the soil moisture content is the highest it can be and the concentration of the desorbed components will be at its lowest level. The measured soil moisture content at saturated conditions was found to be 64% for the source area vadose zone soil. The measured field moisture capacity was 35% (field moisture capacity is the soil moisture capacity after the soil has been allowed to naturally drain). The initial soil moisture content of the source area vadose zone soil was 9%.

There are a wide range of possible reasons for ineffective perchlorate biodegradation in the partially saturated vadose zone treatment including:

- High perchlorate concentration (Bardiya and Bae [8])
- High salinity (Park and Marchand [9]; Chung et al. [10]; Logan et al. [11])
- High or low pH (Wang et al. [6]; Xu et al. [7])
- Moisture content (Nozawa-Inoue et al. [5]; Evans and Trute [12]).
- Presence of inhibitory constituents (Song and Logan [13]; Attaway and Smith [14]) or production of inhibitory metabolites from incomplete fermentation in unsaturated conditions
- Lack of sufficient macronutrients (e.g. nitrogen) and/or micronutrients (e.g. molybdenum) (Hatzinger et al. [15]; Chaudhuri et al. [16])
- High oxidation/reduction potential conditions and/or aerobic conditions (Coates and Achenbach [17])
- Combinations of the above

The results of an extraction analysis performed on the vadose zone soil indicate that the readily dissolvable solids are about 3,300 mg/kg (dry weight basis) from the soil. For a moisture content of 15% and 25%, the average salinity in the pore water is on the order of 22,000 and 13,200 mg/L, respectively. At saturated conditions, the pore water salinity would be on the order of 5,000 mg/L. Park and Marchand

[9] found inhibition of perchlorate biodegradation at 4% salinity (~40,000 mg/L) for some bacteria, whereas other bacteria were able to degrade perchlorate at 4% salinity. Similar observations were made by Logan et al. [11] who found that the source of bacteria (fresh versus saline water) determined their ability to degrade perchlorate under saline conditions in the 1% to 7% range.

Based on the initial perchlorate soil concentration of 4,000 µg/kg, the average perchlorate concentration in the pore water at 15% moisture content would be in the range of 27 mg/L. Reported perchlorate inhibition occurs at concentrations of 7,000 mg/L (Byrd and Bae [8]). Clearly, the expected level of pore water perchlorate concentration is well below this concentration. Further, the perchlorate was readily degraded in the source area groundwater at concentrations of 60 mg/L. Thus, perchlorate inhibition is unlikely.

With respect to pH, soil pH measurements are made by mixing 100 g of soil with 100 g of deionized water. This is equivalent to 100% moisture content. The measured pH of the vadose zone soil was 9.3 (see Table 9). At a moisture content of 15%, there is a likelihood that the pore water pH is higher than 9.3. Little or no perchlorate biodegradation has been shown to occur at this pH by some researchers (Wang et al. [6]; Xu et al. [7]). On the other hand, Evans et al. reported that perchlorate in vadose zone soil can be reduced at an initial pH value between 9.3 and 9.8 [12].

Overall, salinity or pH inhibition or unbalanced fermentation may be primary factors for the lack of perchlorate degradation observed in the unsaturated microcosm tests at 15% and 25% moisture content, and the complete perchlorate biodegradation that was observed under saturated conditions. These inhibitive effects may be overcome via dilution. It would appear that moisture content between 25% and 65% may provide the necessary dilution.

4.2.2 Source Area Vadose Zone Column Testing

During the vadose zone microcosm testing, it was found that none of the tested amendments, with or without nutrient addition, was able to yield the desired perchlorate biodegradation. Perchlorate biodegradation only occurred when the vadose zone soil was saturated. Thus, the vadose zone columns were operated in such a way to create saturated conditions at least temporarily. Donor solutions were applied in either a batch mode (Treatment Scenario 1) or recirculating mode (Treatment Scenario 2).

The electron donor used in the saturated vadose zone microcosm was sodium acetate. However, as noted in the source area groundwater column study, sodium acetate was considered to be less desirable than EOS or glycerin, which minimized added ions to the groundwater due to the treatment process. Therefore, for the vadose zone columns, EOS and glycerin were selected as the two test electron donors.

To confirm the effectiveness of EOS and glycerin to stimulate perchlorate degradation under saturated conditions, a saturated vadose zone microcosm test was conducted with the new source area vadose zone soil collected from the site that was found to have an average perchlorate concentration of 100 mg/kg. The amending solution contained EOS or glycerin at a

A seemingly anomalous result is the reduction of perchlorate in the recirculating control column. In the initial vadose zone microcosms, the soil sample used for those tests was found to have little or no perchlorate and a TOC concentration of 100 mg/kg, or less than 0.1% organic content. The newer vadose zone soil collected for the column work had considerable perchlorate, 1,100 mg/kg, and an organic content of 2.1%. The soil used in the column work had considerably more organic matter. Based on the recirculation vadose zone column results, the existing organic matter in the site soil may be able to provide sufficient electron donation for perchlorate biodegradation. The recirculation of water through the column appears to provide a suitable condition for the reduction to occur. Although perchlorate reduction in the control was limited in the microcosm testing using the new vadose zone soil sample (Figure 16), there was a downward trend in the control perchlorate microcosm towards the end of that test.

Perchlorate biodegradation in the recirculation vadose zone columns is consistent with the microcosm

5.0 SUMMARY OF FINDINGS/CONCLUSIONS

In summary, initial source area groundwater, and aquifer and vadose zone soil parameters were measured for samples from the source area to verify perchlorate levels, and provide initial characterization of samples. The perchlorate level in the source area groundwater was found to be consistent with prior measurements; however, the vadose zone soil was found to have little perchlorate and required spiking to 4,000 µg/kg. Additional vadose zone soil was collected for use in the latter stages of the study. This soil had concentrations of perchlorate of approximately 100 mg/L.

5.1 SOURCE AREA GROUNDWATER TESTS

- The rates of reduction were relatively similar for these three amendments, with complete reduction observed in the microcosms within a timeframe of between 7 and 18 days.
- The addition of 1 g/L of diammonium phosphate resulted in earlier initiation of the perchlorate degradation by about two days, which is not considered significant in remedial timeframes typically undertaken in the field.
- In the column studies, amending soil with EOS had significant advantages over using glycerin as

columns. Removal of perchlorate in the control columns, while surprising, occurred most likely due to the significant organic content (2.3%) measured in the second vadose zone soil sample collected from the Site. In contrast, little or no perchlorate degradation was noted in the batch flooded columns during the eight-week testing period.

Major conclusions of the source area vadose zone tests are as follows:

- EOS, glycerin, and sodium acetate were shown in microcosm testing to be effective in stimulating biological reduction of perchlorate in vadose zone soil under saturated conditions only. Minimal perchlorate degradation occurred at 15% and 25% moisture content.
- EOS and glycerin were considered to be preferable electron donors based on a desire to minimize salt ion addition.
- The addition of 1 g/L of diammonium phosphate results in earlier initiation of perchlorate degradation under saturated conditions by about two or three days.
- In the column studies, the recirculation approach was shown to be effective in reducing soil perchlorate in the vadose zone soil, whereas the batch application resulted in minimal perchlorate degradation.
- The specific reason why perchlorate biodegradation occurs only under saturated conditions is not fully understood. It is speculated that salinity, pH conditions, and/or unbalanced fermentation at the low moisture condition may inhibit specific perchlorate-reducing organisms in the vadose zone soil. It should be noted that nitrate reduction was not inhibited; the reasons for this disparity are not clear.

Thus, based on the laboratory study, both EOS and glycerin may be considered to be acceptable alternatives for field implementation in treating the source area vadose zone soil, but only under continually saturated conditions. It also may be possible to take advantage of the existing soil organic content in the vadose zone soil in some areas of the site during engineering implementation in the field.

7.0 REFERENCES

[1] Tetra Tech and UCR (2009). Technical Memo for Laboratory Microcosm and Column Studies to Investigate Biobarrier Application for Treatment of Perchlorate-Impacted Groundwater.

[2] ASTM D4874-95, Standard Test Method for Leaching Solid Waste in a Column Apparatus, Annual Book of ASTM Standards, vol. 11.04, ASTM D-4874-95 (2003) (reapproved 2001), American Society for Testing and Materials.

[3] Standard Methods for the Examination of Water and Wastewater, 21st ed., (2005). American Public Health Association, Water Environment Federation, and American Water Works Association.

[4] ASTM D4327-03 Standard Test Method for Anions in Water by Chemically Suppressed Ion Chromatography, Annual Book of ASTM Standards, vol. 11.01, (2003). American Society for Testing and Materials.

[5] Nozawa-Inoue, M., K.M. Scow, and D.E. Rolston, Reduction of perchlorate and nitrate by microbial communities in vadose soil. Applied and Environmental Microbiology, (2005). 71(7): p. 3928-3934.

[6] Wang, C., L. Lippincott, and X. Meng (2008). Kinetics of biological perchlorate reduction and pH effect, Journal of Hazardous Materials, 153(1-2): 663-669.

[7] Yu, X., C. Amrhein, M.A. Deshusses, and M.R. Matsumoto (2006). Perchlorate reduction by autotrophic bacteria in the presence of zero-valent iron, Environmental Science and Technology, 40(4): 1328-1334.

[8] Bardiya, N. and J.-H. Bae (2005). Bioremediation potential of a perchlorate-enriched sewage sludge consortium." Chemosphere, 58(1): 83-90.

[9] Park, C. and E.A. Marchard (2006). Modelling salinity inhibition effects during biodegradation of perchlorate." Journal of Applied Microbiology, 101(1): 222-233.

[10] Chung, J., R. Nerenberg, and B.E, Rittmann (2007). Evaluation for biological reduction of nitrate and perchlorate in brine water using the hydrogen-based membrane biofilm reactor, Journal of Environmental Engineering, 133(2), 157-164.

[11] Logan, B.E., J. Wu, and R.F. Unz (2001). Biological Perchlorate Reduction in High-Salinity Solutions. Water Research, 35(12): 3034-3038.

[12] Evans, P.J. and M.M. Trute (2006). In Situ Bioremediation of Nitrate and Perchlorate in Vadose Zone Soil for Groundwater Protection Using Gaseous Electron Donor Injection Technology, Water Environment Research, 78(13): 2436-2446.

[13] Song, Y.G. and Logan, B. E. (2004), Inhibition of aerobic respiration and dissimilatory perchlorate reduction using cyanide, FEMS Microbiology Letters, 239(2), 229-234.

[14] Attaway, H., and Smith, M. (1993), Reduction of perchlorate by an anaerobic enrichment culture, Journal of Industrial Microbiology, 12(6), 408-412.

[15] Hatzinger, P.B. M.C. Whittier, M.D. Arkins, C.W. Bryan, W.J. Guarini (2002). In-Situ and Ex-Situ Bioremediation Options for Treating Perchlorate in Groundwater." Remediation, 12(2): 69-86.

[16] Chaudhuri, S.K., S.M. O'Connor, R.L. Gustavson, L.A. Achenbach, and J.D. Coates (2002). Environmental Factors That Control Microbial Perchlorate Reduction, Applied Environmental Microbiology, 48(9), 4425-4430.

[17] Coates, J.D. and L.A. Achenbach (2004). Microbial perchlorate reduction: rocket-fuelled metabolism, Nature Reviews Microbiology, 2(7): 569-580.

[18] Tetra Tech, Inc. (2010). Dynamic Site Investigation and Summary Remedial Investigation Report, Lockheed Martin Corporation, Beaumont Site 2, Beaumont, California, dated April 2010.

FIGURES

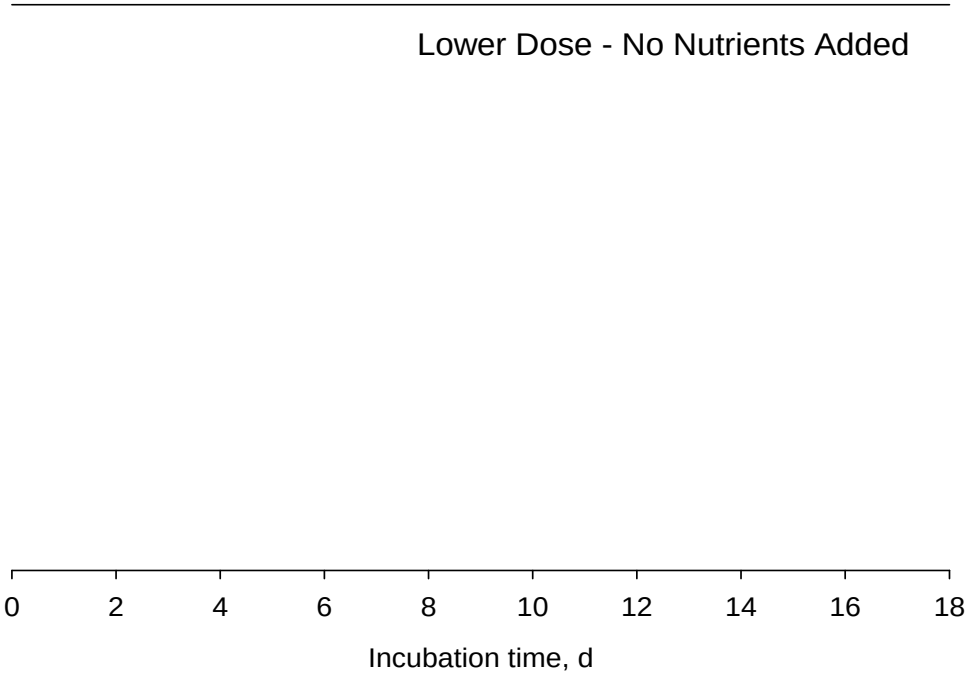
Lower Dose - No Nutrients Added
0
2
4
6
8
10
12
14
16
18
Incubation time, d

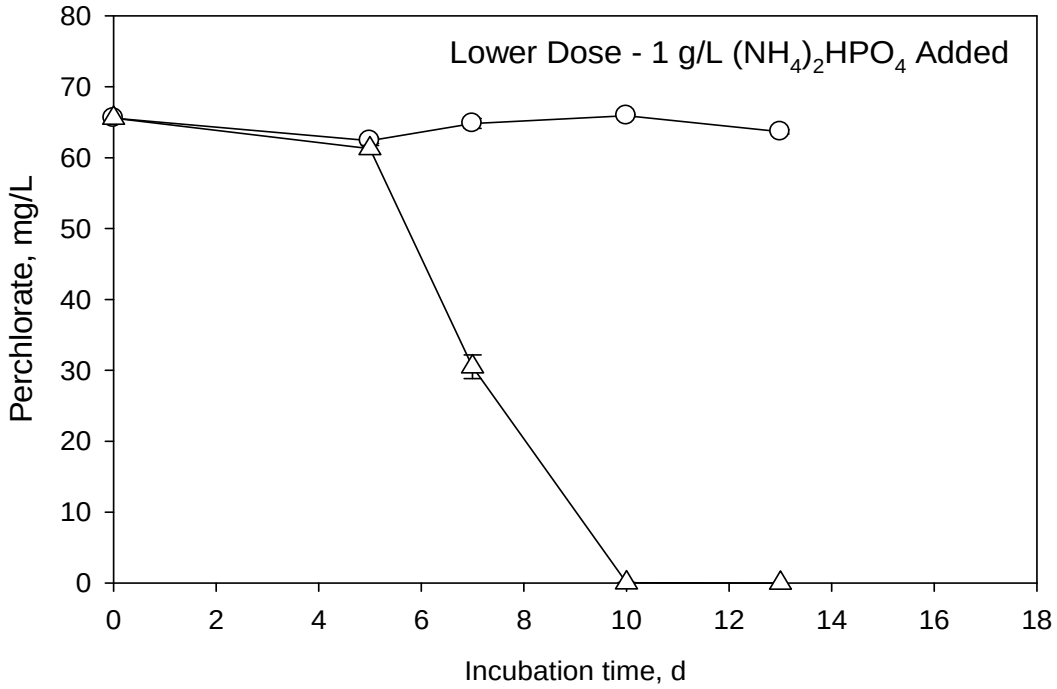
Lower Dose - 1 g/L $(NH_4)_2HPO_4$ Added
Perchlorate, mg/L
Incubation time, d
0
10
20
30
40
50
60
70
80
0
2
4
6
8
10
12
14
16
18

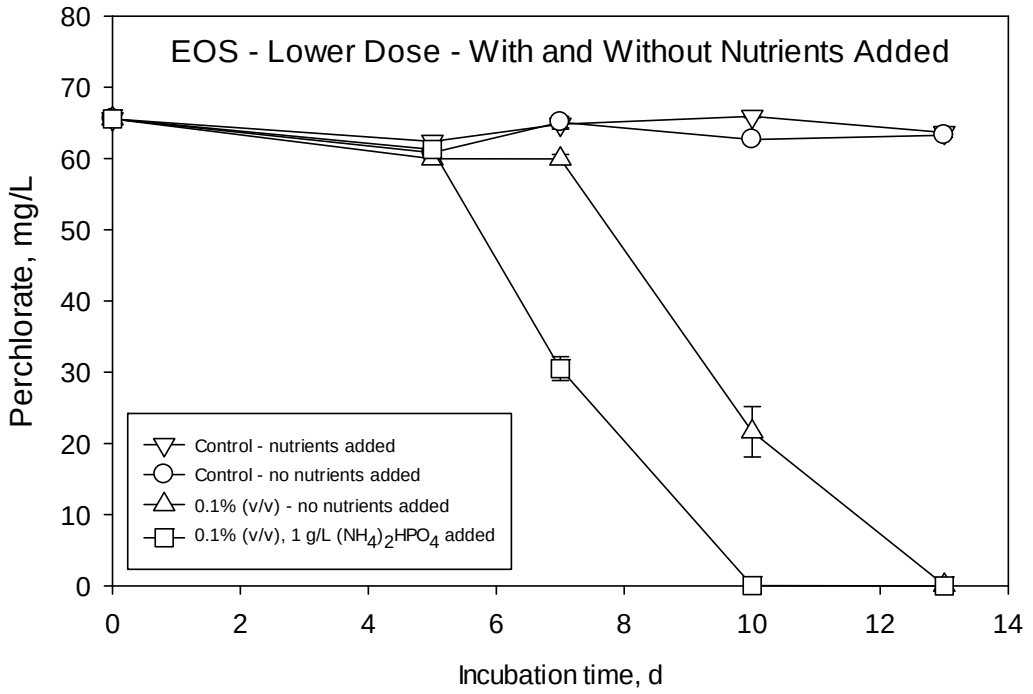

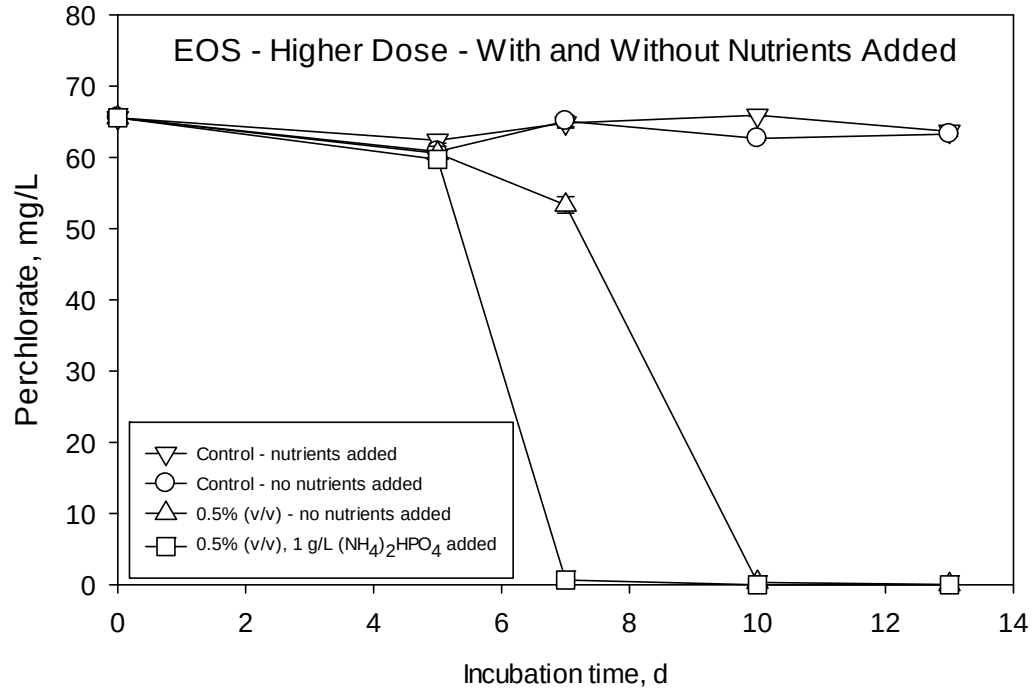

Notes:
$(NH_4)_2HPO_4$–diammonium phosphate EOS – emulsified oil substrate mg/L – milligrams per liter
v/v – volume-to-volume d – days % – percent

Figure 3 Perchlorate Reduction inEOS Amended Source Area Microcosms
(Top: Low Dosage; Bottom: High Dosage)

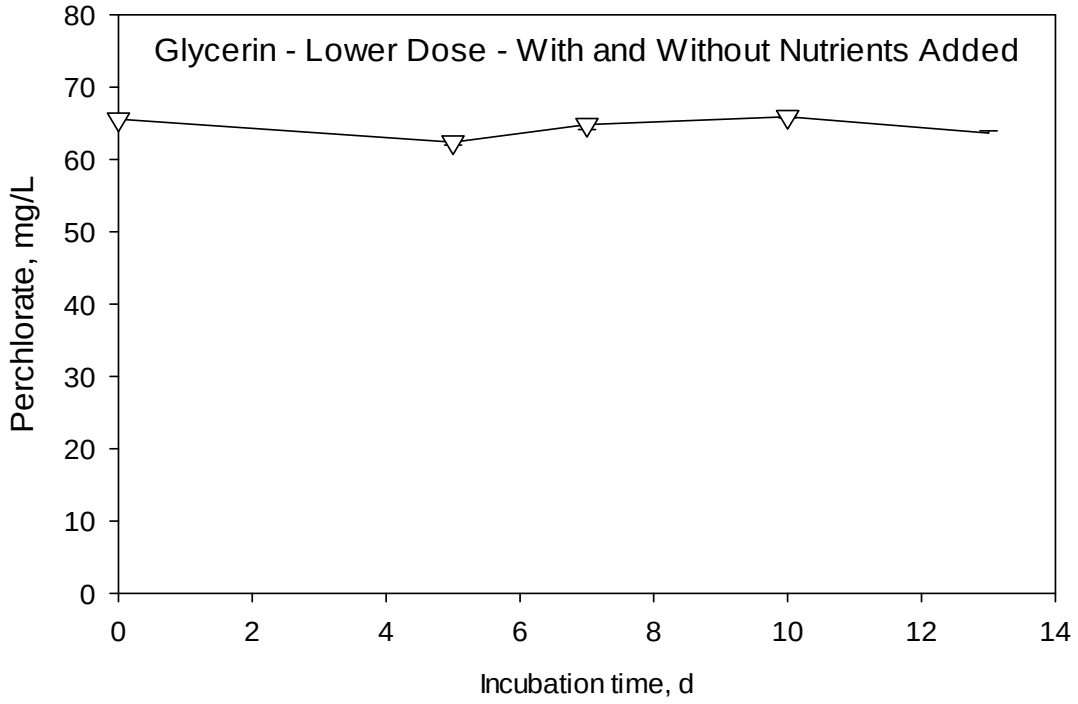
Glycerin - Lower Dose - With and Without Nutrients Added
Perchlorate, mg/L
Incubation time, d
0
10
20
30
40
50
60
70
80
0
2
4
6
8
10
12
14

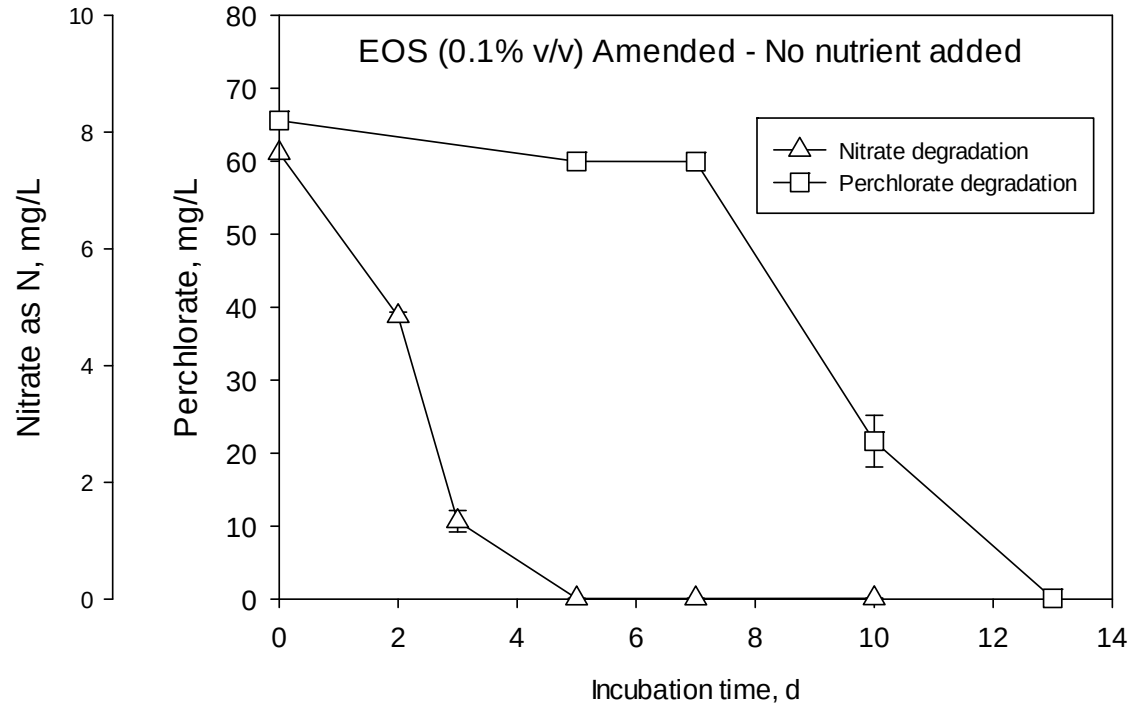

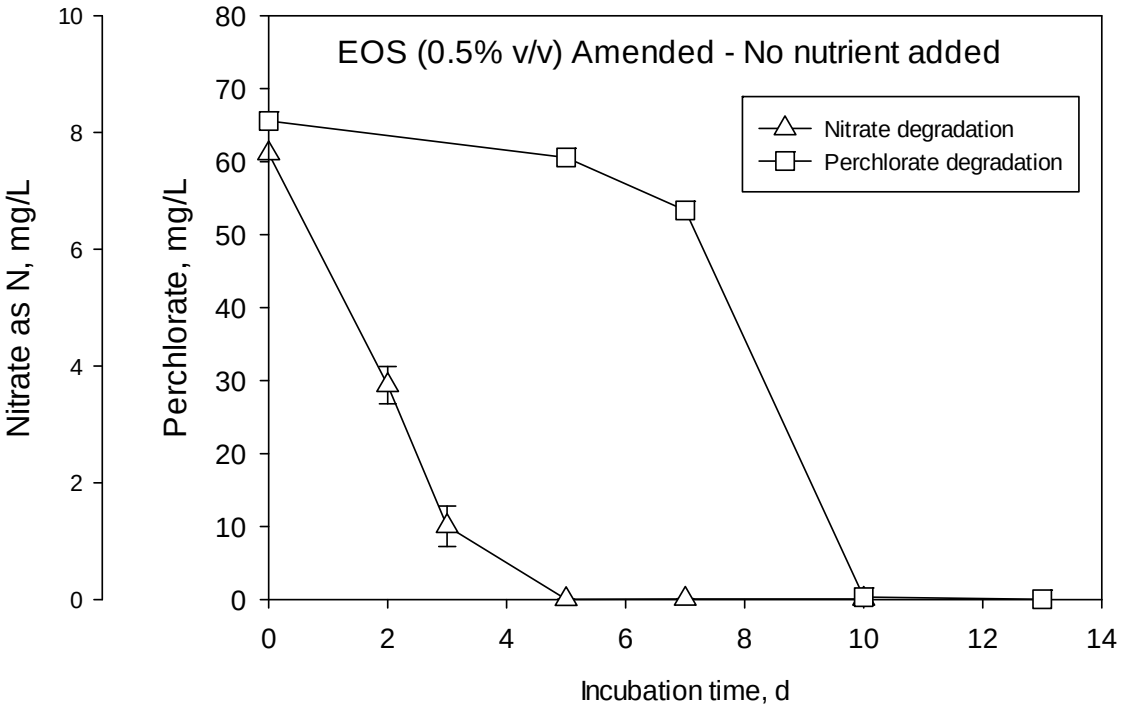

Notes:
N–nitrogen EOS – emulsified oil substrate mg/L–milligrams per liter v/v – volume-to-volume
d – days % – percent

Figure 5 Nitrate and Perchlorate Reduction in EOS Amended Source Area Microcosms

Glycerin (0.1% v/v) Amended - No nutrient added



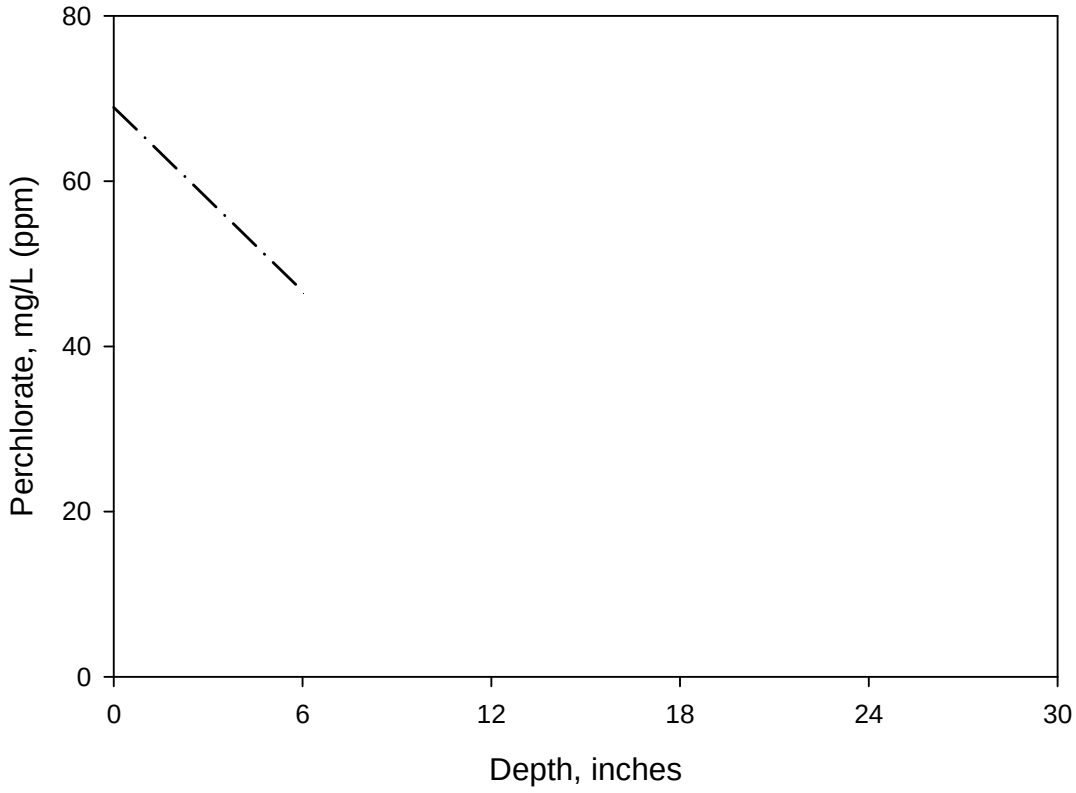
80
60
40
20
0
Perchlorate, mg/L (ppm)
0
6
12
18
24
30
Depth, inches

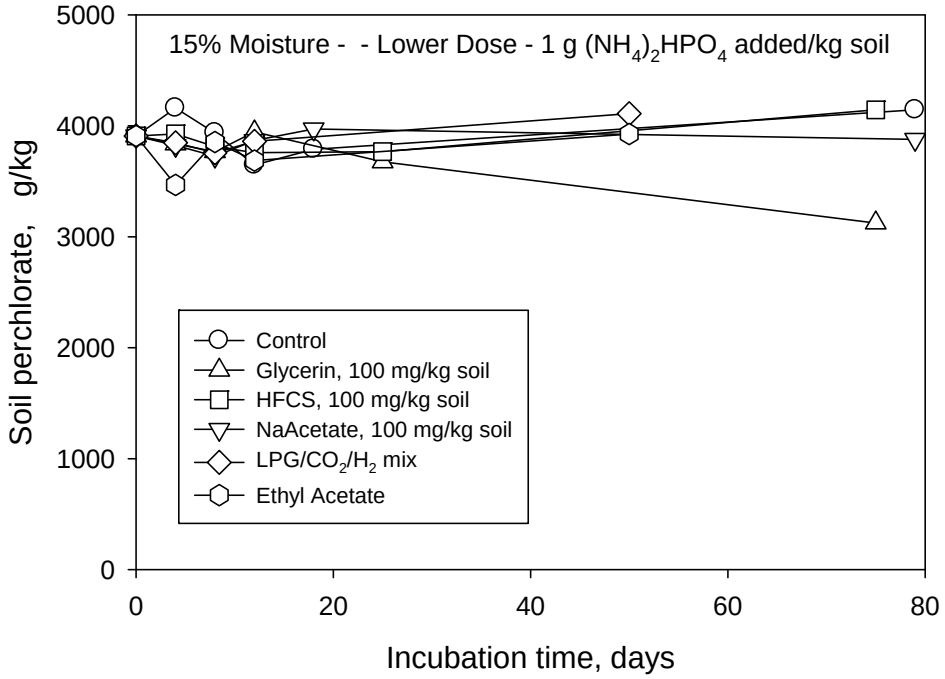
15% Moisture - - Lower Dose - 1 g (NH4)2HPO4 added/kg soil
Soil perchlorate, g/kg
Incubation time, days
Control
Glycerin, 100 mg/kg soil
HFCS, 100 mg/kg soil
NaAcetate, 100 mg/kg soil
LPG/CO2/H2 mix
Ethyl Acetate
0
1000
2000
3000
4000
5000
0
20
40
60
80

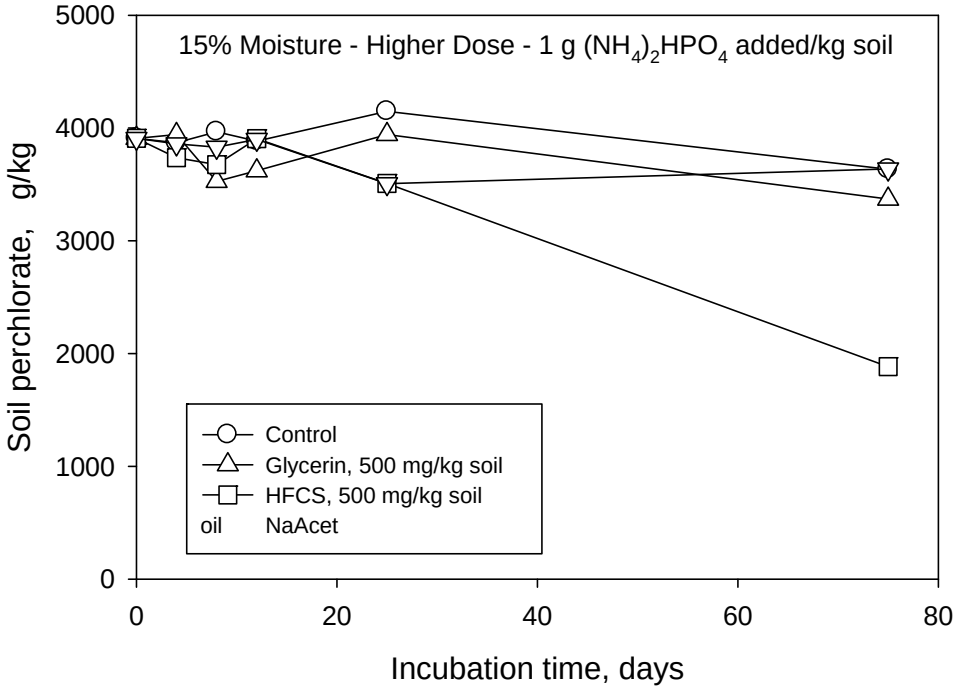
15% Moisture - Higher Dose - 1 g (NH4)2HPO4 added/kg soil
Soil perchlorate, g/kg
Incubation time, days
Control
Glycerin, 500 mg/kg soil
HFCS, 500 mg/kg soil
oil NaAcet
0
1000
2000
3000
4000
5000
0
20
40
60
80

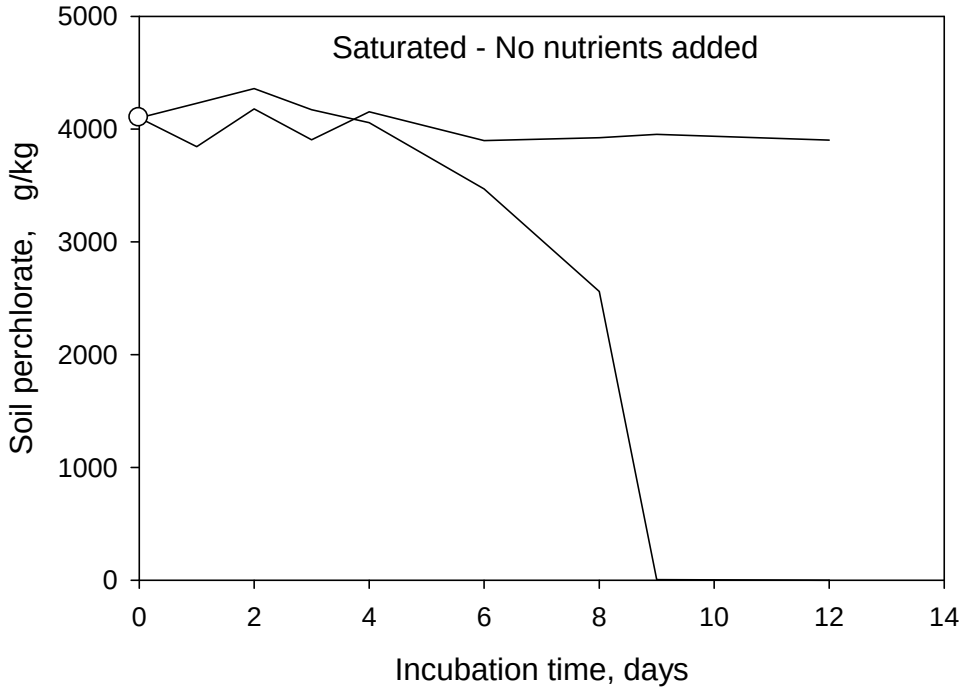
Saturated - No nutrients added
Soil perchlorate, g/kg
5000
4000
3000
2000
1000
0
0
2
4
6
8
10
12
14
Incubation time, days

T

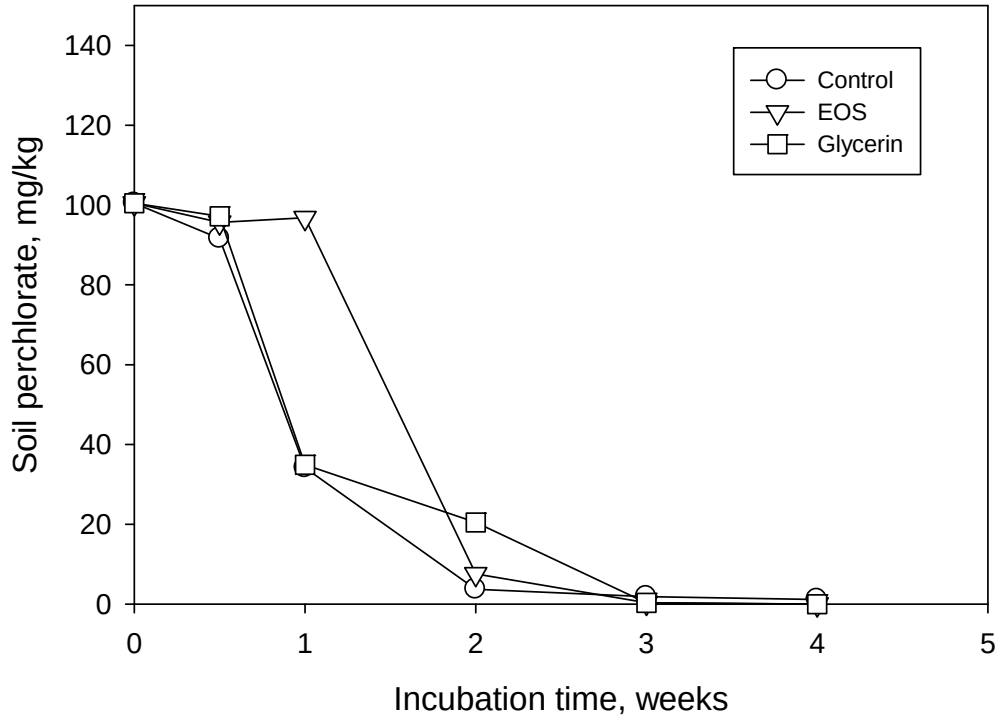

Notes: EOS– emulsified oil substrate mg/kg – milligrams per kilogram

Figure 20 Perchlorate Results – Vadose Zone Columns – Recirculation Application (Scenario 2)

APPENDIX A

LABORATORY REPORTS